



- 1 Roaming customer sends USERID and Password to NAS
- 2 NAS forwards USERID and password to AAA server
- 3 AAA Server generates YES or NO response
- 4 NAS transmits START attributes to the AAA Server
- 5 AAA stores START attributes to the Data Base
- 6 Roaming customer connected to the Internet


**FIG. 1**

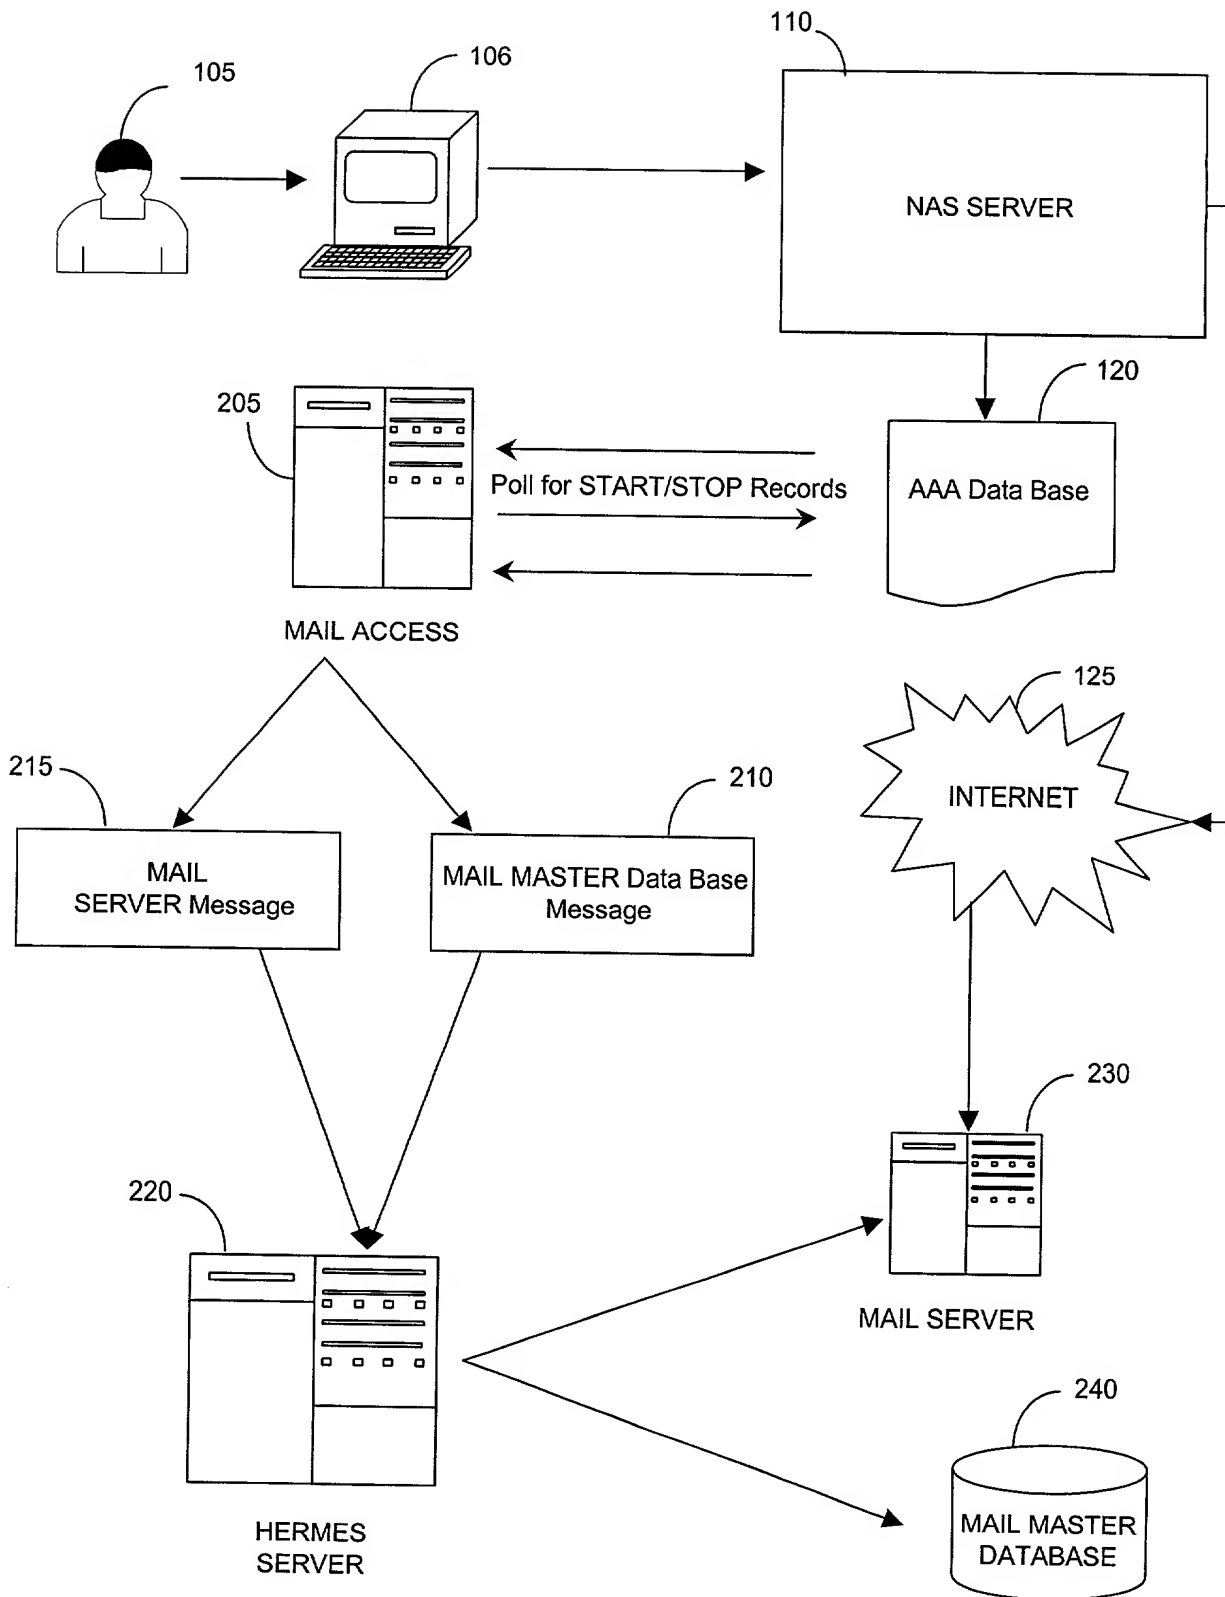


**FIG. 2**

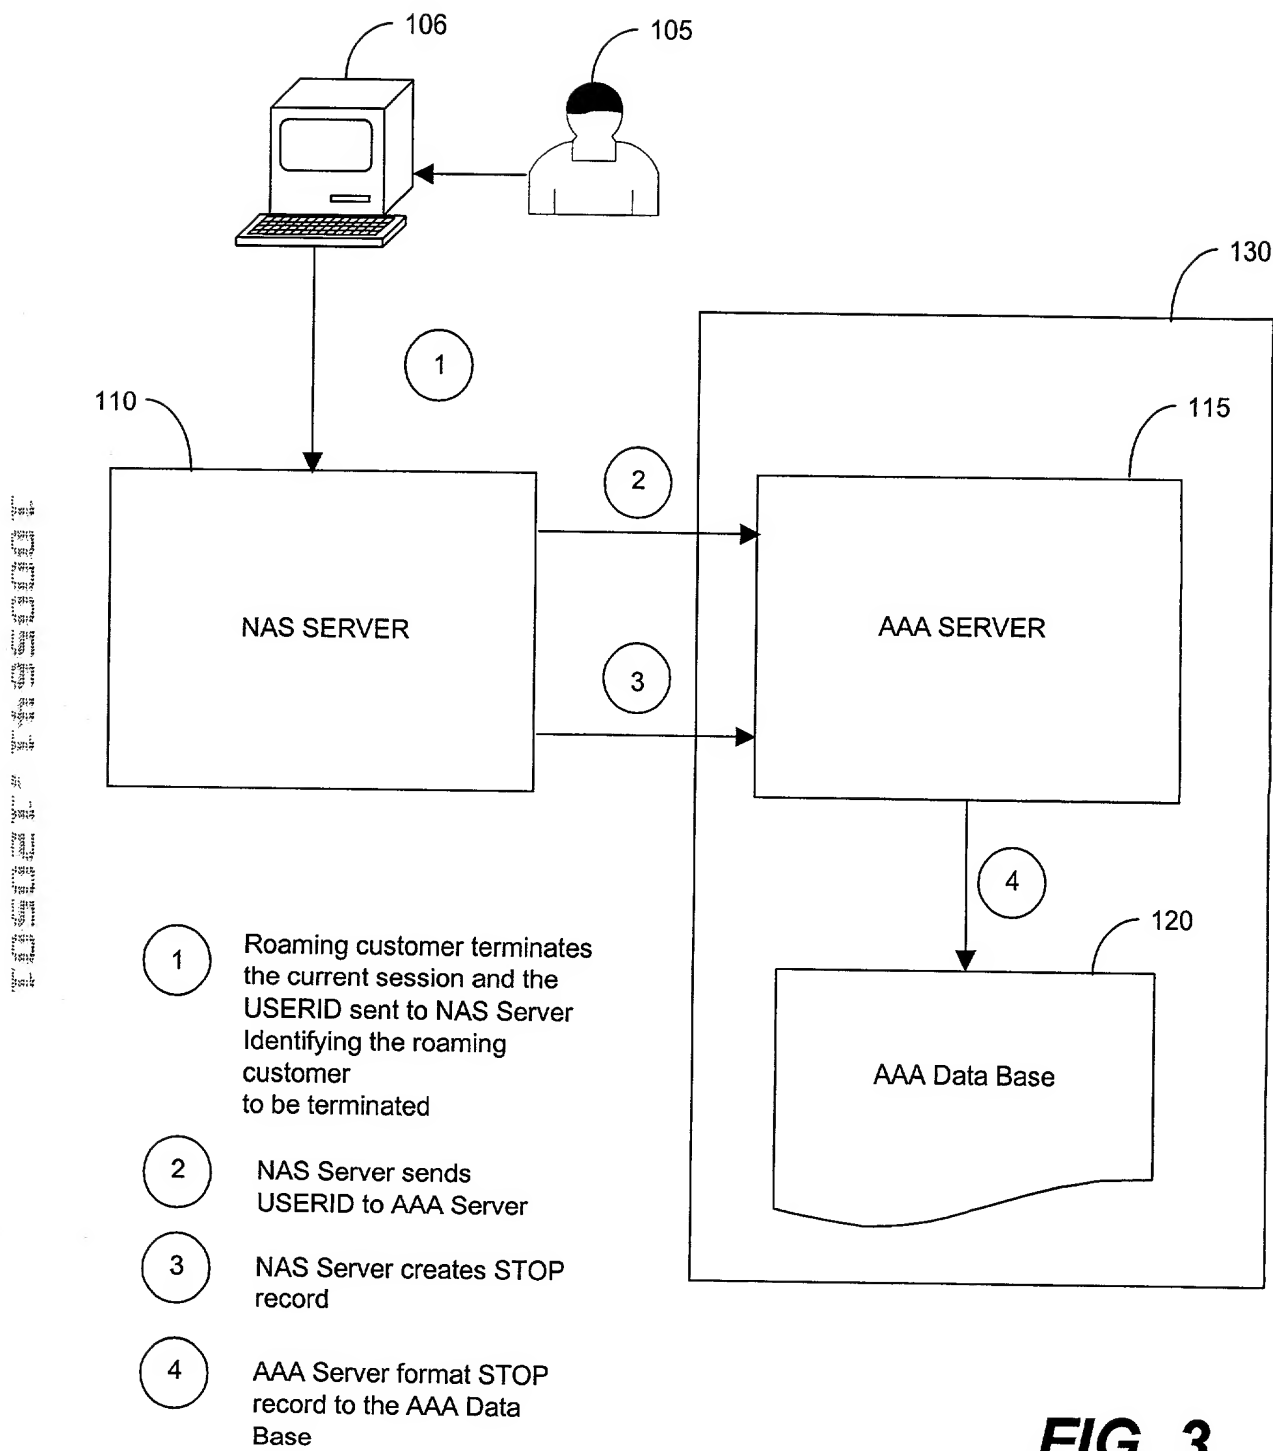


**FIG. 3**

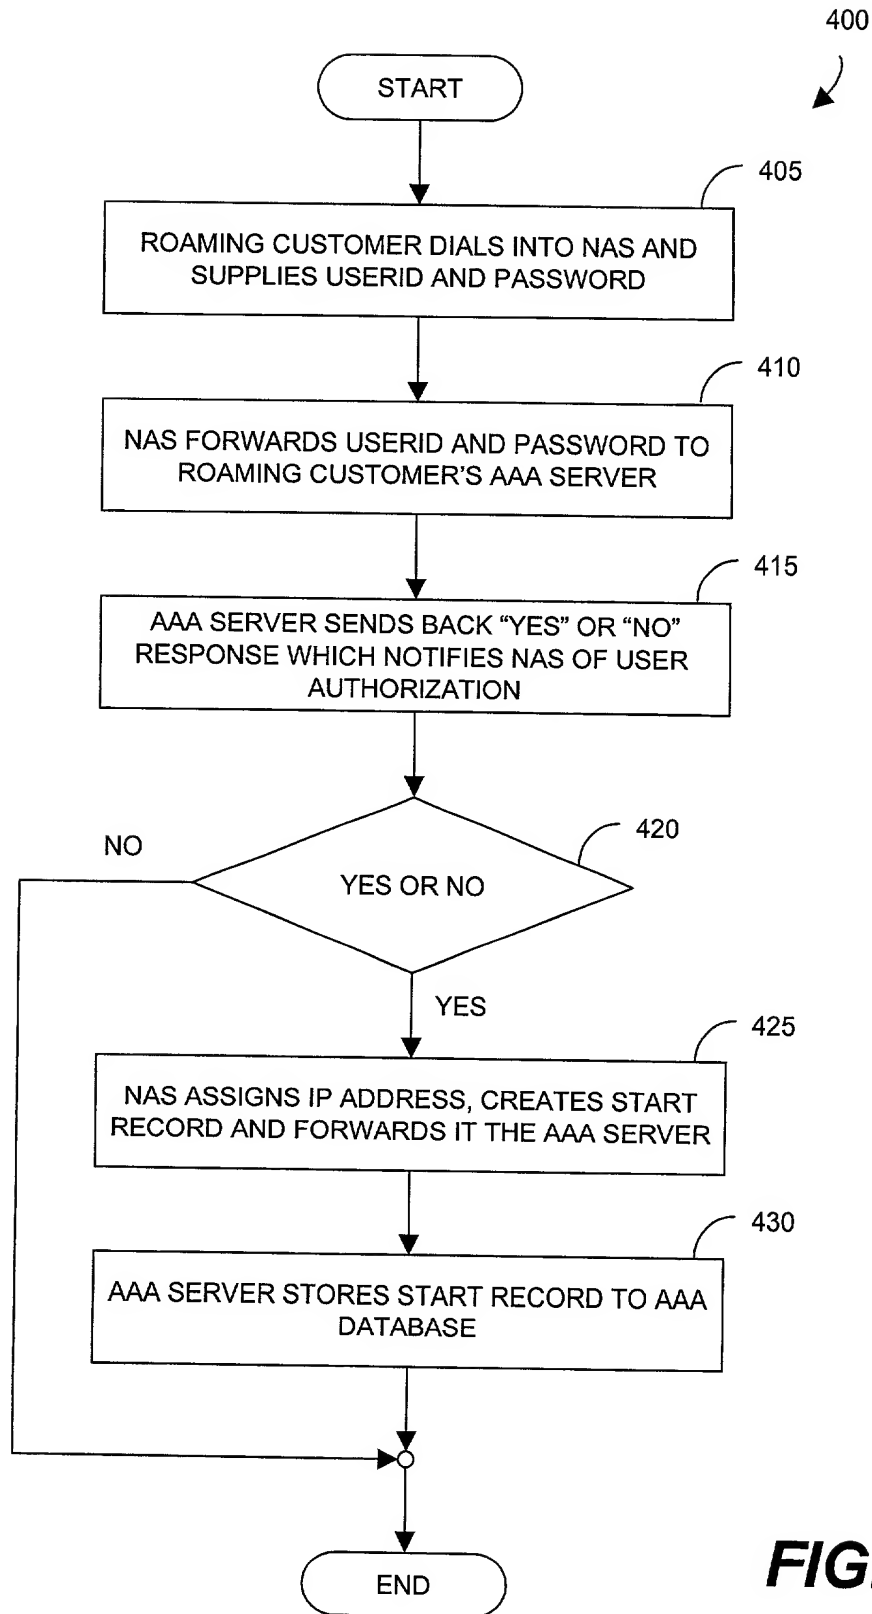


**FIG. 4**

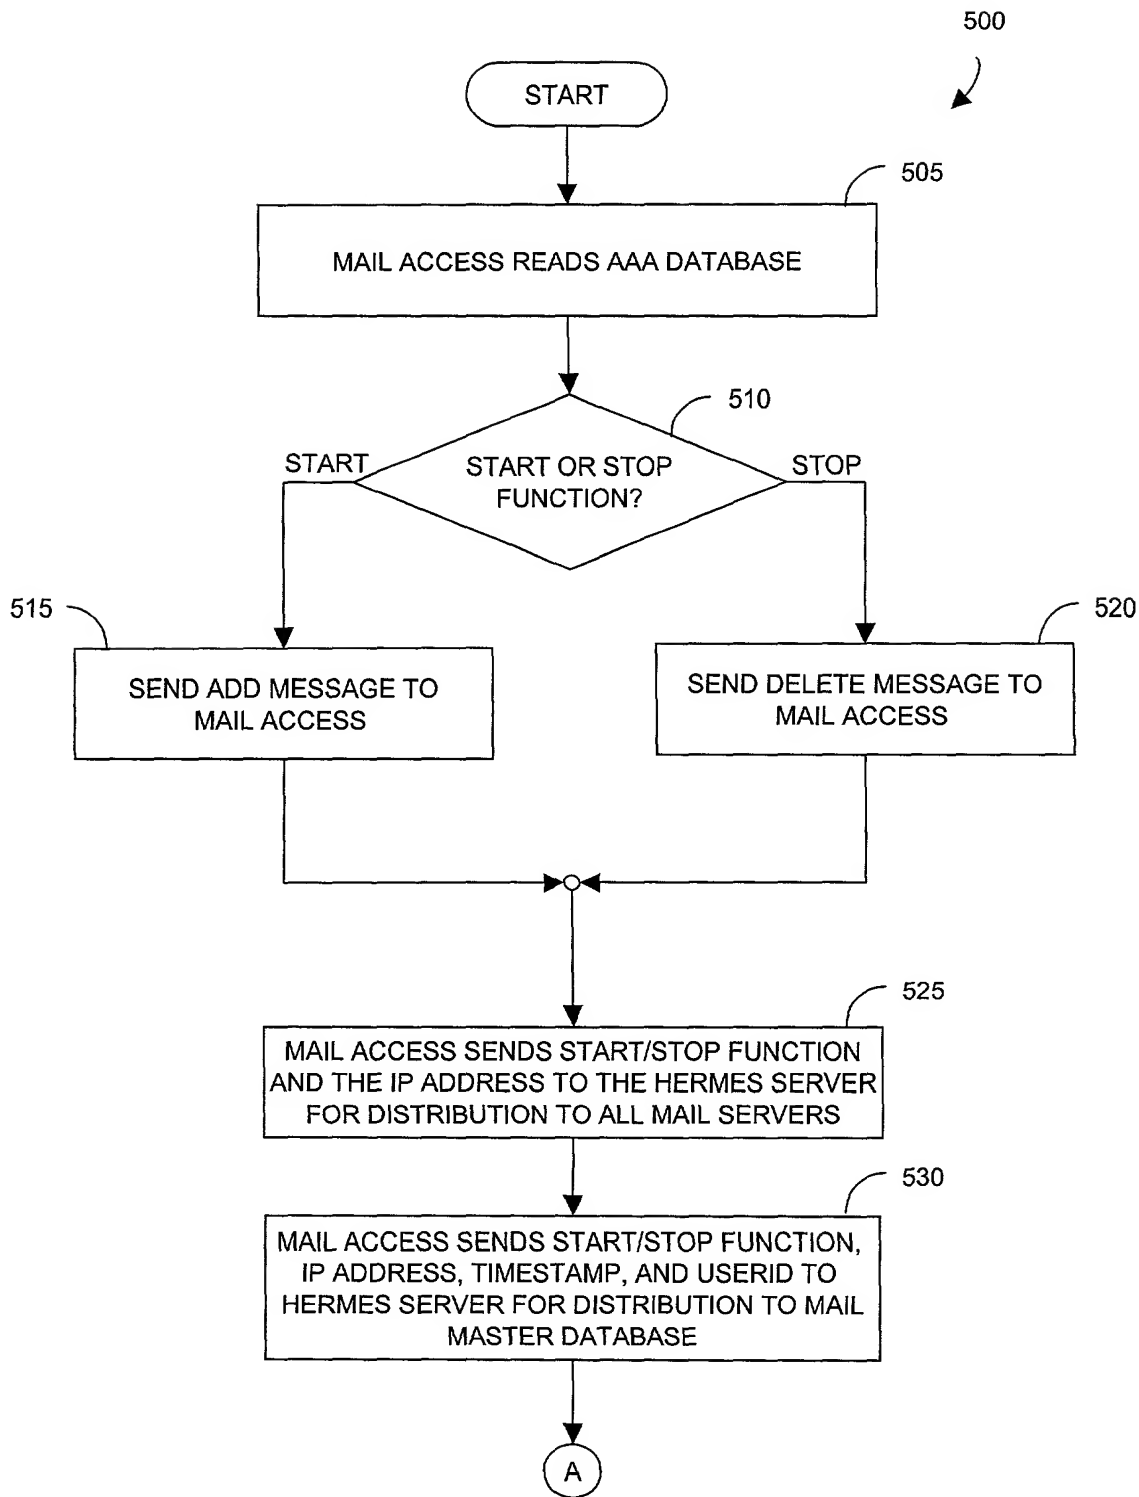

**FIG. 5A**

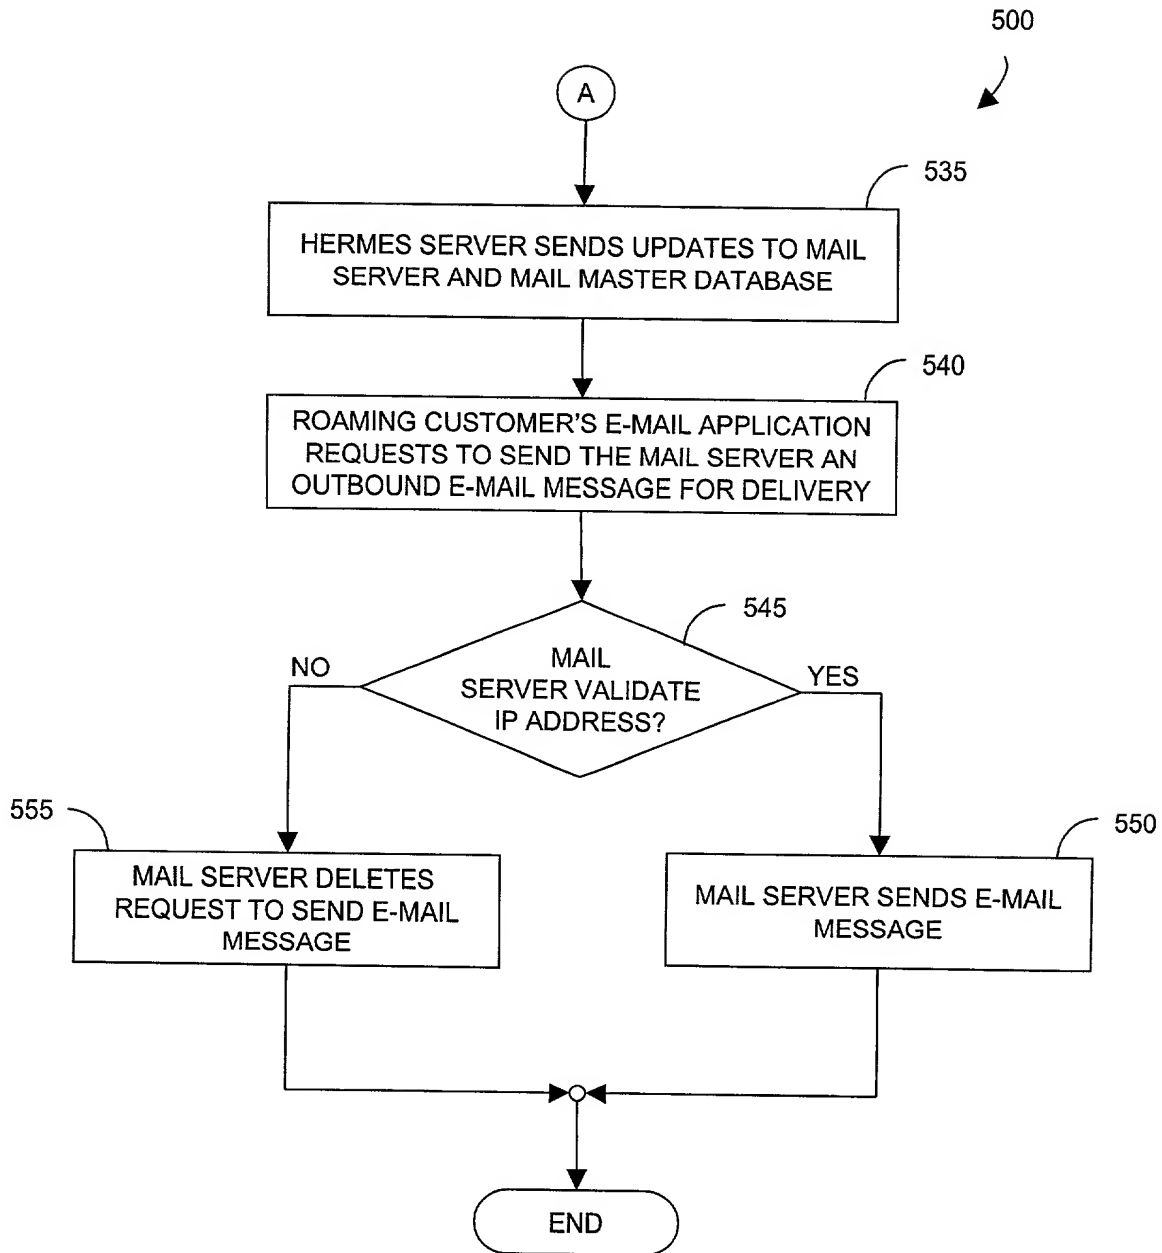

**FIG. 5B**

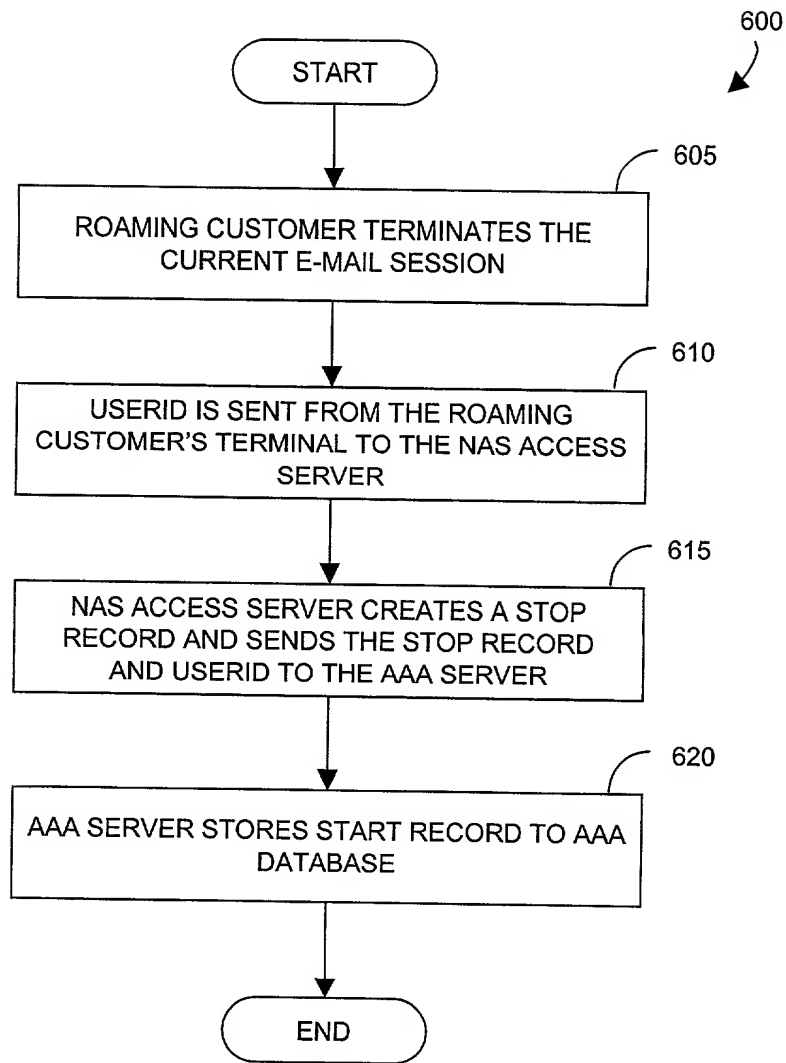

**FIG. 6**